


# LF 3600 Push-In Fittings / Stud Fittings



Made of chemical nickel-plated brass, this range of metal fittings is resistant to industrial and food fluids.

**Ø metric:**  
4 to 14 mm

## Technical Characteristics

- **Suitable Fluids:** compressed air, grease, lubricant, water...
- **Working Pressure:** vacuum to 30 bar (20 bar: 3699, 3609, 3639)
- **Working Temperature:** -25°C to +150°C

Maximum Tightening Torque (daN.m)	Threads							
	M5 x0.8	M6 x1	M8 x1	M10 x1	G1/8	G1/4	G3/8	G1/2
	0.16	0.18	0.6	0.8	0.8	1.2	3	3.5


Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages

- Wide range of working temperatures: up to +150°C
- Wide range of working pressures: from vacuum up to 30 bar
- Materials conform to FDA standards
- Extended chemical compatibility

## Component Materials

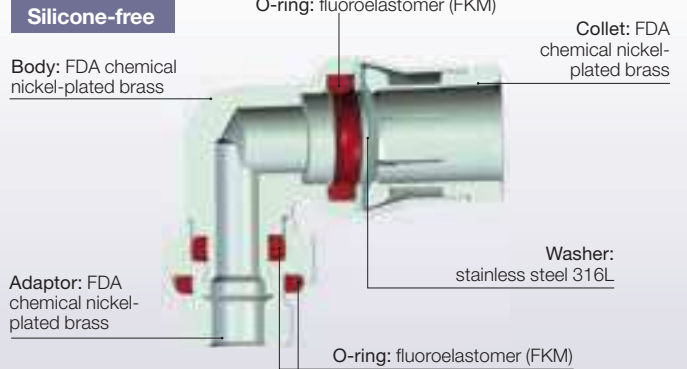


## Regulations

- PED
- RoHS
- REACH
- EN 45545-2

## 3675 Stud Fitting, Male BSPT Thread


FDA chemical Nickel-plated brass, FKM



ØD	C		F1	F2	H	Kg
4	R1/8	<b>3675 04 10</b>	10	3	15	0.009
	R1/4	<b>3675 04 13</b>	14	3	15	0.017
6	R1/8	<b>3675 06 10</b>	13	4	17	0.011
	R1/4	<b>3675 06 13</b>	14	4	17	0.018
8	R1/8	<b>3675 08 10</b>	15	5	19	0.015
	R1/4	<b>3675 08 13</b>	16	6	18	0.019
10	R3/8	<b>3675 08 17</b>	17	6	18.5	0.027
	R1/4	<b>3675 10 13</b>	18	7	23	0.026
12	R3/8	<b>3675 10 17</b>	18	8	22.5	0.031
	R1/2	<b>3675 10 21</b>	22	8	22.5	0.056
14	R1/4	<b>3675 12 13</b>	20	7	25.5	0.033
	R3/8	<b>3675 12 17</b>	20	9	24	0.035
16	R1/2	<b>3675 12 21</b>	22	10	23	0.051
	R3/8	<b>3675 14 17</b>	22	9	27	0.042
18	R1/2	<b>3675 14 21</b>	24	11	26	0.057

## 3601 Stud Fitting, Male BSPP and Metric Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		E	F1	F2	H	Kg
4	M5x0.8	<b>3601 04 19</b>	3.5	10	2.5	15.5	0.006
	M6x1	<b>3601 04 52</b>	4.5	10	3	16	0.006
6	M8x1	<b>3601 04 56</b>	5	11	3	14.5	0.007
	G1/8	<b>3601 04 10</b>	5.5	13	3	14.5	0.009
8	G1/4	<b>3601 04 13</b>	6.5	16	3	14.5	0.015
	M5x0.8	<b>3601 06 19</b>	3.5	13	2.5	19	0.010
10	M10x1	<b>3601 06 60</b>	5.5	13	4	17.5	0.011
	G1/8	<b>3601 06 10</b>	5.5	13	4	17.5	0.011
12	G1/4	<b>3601 06 13</b>	6.5	16	4	17	0.015
	G1/8	<b>3601 08 10</b>	5.5	16	5	21	0.014
14	G1/4	<b>3601 08 13</b>	6.5	16	6	18	0.016
	G3/8	<b>3601 08 17</b>	7.5	20	6	19	0.028
16	G1/4	<b>3601 10 13</b>	6.5	18	7	25	0.025
	G3/8	<b>3601 10 17</b>	7.5	20	8	22.5	0.028
18	G1/2	<b>3601 10 21</b>	9	24	8	22.5	0.043
	G1/4	<b>3601 12 13</b>	6.5	20	7	26.5	0.030
20	G3/8	<b>3601 12 17</b>	7.5	20	9	26	0.034
	G1/2	<b>3601 12 21</b>	9	24	10	23.5	0.042
22	G3/8	<b>3601 14 17</b>	7.5	22	9	28	0.038
	G1/2	<b>3601 14 21</b>	9	24	11	26.5	0.045

# LF 3600 Push-In Fittings / Stud Fittings

## 3681 Stud Fitting with Internal Hexagon, Male Metric Thread


FDA chemical Nickel-plated brass, FKM



ØD	C		E	F	G	H	Kg
4	M5x0.8	<b>3681 04 19</b>	3.5	2.5	10	16	0.005

## 3614 Stud Fitting, Female BSPP and Metric Thread


FDA chemical Nickel-plated brass, FKM



ØD	C		E	F	H	Kg
4	M5x0.8	<b>3614 04 19</b>	5	10	22	0.009
	G1/8	<b>3614 04 10</b>	7.5	14	25	0.016
	G1/4	<b>3614 04 13</b>	11	17	29	0.026
6	G1/8	<b>3614 06 10</b>	7.5	14	27.5	0.019
	G1/4	<b>3614 06 13</b>	11	17	31.5	0.028
8	G1/8	<b>3614 08 10</b>	9.5	15	28.5	0.022
	G1/4	<b>3614 08 13</b>	13.5	17	32.5	0.028
10	G3/8	<b>3614 10 17</b>	14	22	38	0.052
	G3/8	<b>3614 12 17</b>	14	22	39	0.055
12	G1/2	<b>3614 12 21</b>	18.5	24	43.5	0.062

## 3621 Stud Standpipe, Male BSPT Thread


FDA chemical Nickel-plated brass



ØD	C		F	H	H1	Kg
4	R1/8	<b>3621 04 10</b>	10	21	7	0.006
6	R1/8	<b>3621 06 10</b>	10	23.5	6.5	0.008
	R1/4	<b>3621 06 13</b>	14	23.5	6.5	0.016
8	R1/8	<b>3621 08 10</b>	10	24	6.5	0.009
	R1/4	<b>3621 08 13</b>	14	24	6.5	0.017
10	R1/4	<b>3621 10 13</b>	14	22	6.5	0.018
	R3/8	<b>3621 10 17</b>	17	30	7.5	0.022
12	R3/8	<b>3621 12 17</b>	17	31	7.5	0.023
	R1/2	<b>3621 12 21</b>	22	31	7.5	0.041
14	R1/2	<b>3621 14 21</b>	22	33	8	0.042

## 3631 Stud Standpipe, Male BSPP and Metric Thread


FDA chemical Nickel-plated brass, FKM



ØD	C		E	F	H	H1	Kg
4	M5x0.8	<b>3631 04 19</b>	3.5	13	21.5	7	0.003
	G1/8	<b>3631 04 10</b>	5.5	13	20	7	0.007
	G1/4	<b>3631 04 13</b>	6.5	8	20	7.5	0.011
6	G1/8	<b>3631 06 10</b>	5.5	13	22.5	6.5	0.009
	G1/4	<b>3631 06 13</b>	6.5	16	22.5	6.5	0.012
8	G1/8	<b>3631 08 10</b>	5.5	13	22.5	6.5	0.010
	G1/4	<b>3631 08 13</b>	6.5	16	23	6.5	0.013
10	G3/8	<b>3631 08 17</b>	7.5	20	23	7.5	0.018
	G1/4	<b>3631 10 13</b>	6.5	16	28	6.5	0.015
10	G3/8	<b>3631 10 17</b>	7.5	20	28	7.5	0.022
	G1/2	<b>3631 10 21</b>	9	24	28	7.5	0.028
12	G3/8	<b>3631 12 17</b>	7.5	20	29	7.5	0.023
	G1/2	<b>3631 12 21</b>	9	24	29	7.5	0.033
14	G1/2	<b>3631 14 21</b>	9	24	31	8	0.033

## 3600 Cartridge

FDA chemical Nickel-plated brass, FKM




ØD		G	G1	H	H1	H2	N	Kg
4	<b>3600 04 00</b>	9.8	8	17	8.5	8.5	11	0.006
6	<b>3600 06 00</b>	12.1	10	19	10.5	8.5	13.5	0.009
8	<b>3600 08 00</b>	14.8	13	21	12.5	8.5	16	0.012
10	<b>3600 10 00</b>	17.5	15	24.5	14	10.5	20	0.019
12	<b>3600 12 00</b>	20	17	25	14.5	10.5	22.5	0.023
14	<b>3600 14 00</b>	22	20	28.5	16.5	12	25	0.031

Cavity dimension available upon request

## 3609 Stud Elbow, Male BSPT Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		F	G	H	J	L	Kg
4	R1/8	<b>3609 04 10</b>	13	10	15	7	18	0.014
	R1/4	<b>3609 04 13</b>	14	10	17	7	18	0.020
6	R1/8	<b>3609 06 10</b>	13	12	17.5	8	21.5	0.018
	R1/4	<b>3609 06 13</b>	14	12	19	8	21.5	0.025
8	R1/8	<b>3609 08 10</b>	13	15	19.5	10	23.5	0.022
	R1/4	<b>3609 08 13</b>	14	15	21	10	23.5	0.029
10	R3/8	<b>3609 08 17</b>	17	15	21	10	23.5	0.035
	R1/4	<b>3609 10 13</b>	15	17.5	23.5	12	29	0.037
10	R3/8	<b>3609 10 17</b>	17	17.5	25.5	12	29	0.043
	R1/4	<b>3609 12 13</b>	15	19.5	26	15	31	0.049
12	R3/8	<b>3609 12 17</b>	17	19.5	28.5	15	31	0.055
	R1/2	<b>3609 12 21</b>	21	19.5	28.5	15	31	0.072
14	R3/8	<b>3609 14 17</b>	19	21.5	29	16	34	0.063
	R1/2	<b>3609 14 21</b>	22	21.5	30	16	34	0.072

The body swivels for positioning purposes. Maxi pressure = 20 bar

# LF 3600 Push-In Fittings / Stud Fittings

## 3629 Extended Stud Elbow, Male BSPT Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		F	G	H	J	L	Kg
4	R1/8	<b>3629 04 10</b>	10	10	24.5	7	18	0.025
	R1/4	<b>3629 06 13</b>	14	12	30.5	8	21.5	0.031
6	R1/8	<b>3629 06 10</b>	13	12	29.5	8	21.5	0.024
	R1/4	<b>3629 06 13</b>	14	12	30.5	8	21.5	0.031
8	R1/8	<b>3629 08 10</b>	14	15	32.5	10	23.5	0.031
	R1/4	<b>3629 08 13</b>	14	15	34	10	23.5	0.037
10	R1/4	<b>3629 10 13</b>	18	17.5	39	12	29	0.054

The body swivels for positioning purposes.

## 3669 Extended Stud Elbow, Male BSPP and Metric Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		E	F	G	H	J	L	Kg
4	M5x0.8	<b>3669 04 19</b>	3.5	10	10	27.5	7	18	0.014
	G1/8	<b>3669 04 10</b>	5.5	13	10	25.5	7	18	0.017
6	G1/8	<b>3669 06 10</b>	5.5	13	12	31	8	21.5	0.024
	G1/4	<b>3669 06 13</b>	6.5	16	12	30.5	8	21.5	0.028
8	G1/8	<b>3669 08 10</b>	5.5	14	15	33.5	10	23.5	0.031
	G1/4	<b>3669 08 13</b>	5.5	16	15	34	10	23.5	0.035
10	G1/4	<b>3669 10 13</b>	6.5	18	17.5	42	12	29	0.052
	G3/8	<b>3669 10 17</b>	7.5	20	17.5	41	12	29	0.056
12	G1/4	<b>3669 12 13</b>	6.5	20	19.5	47	15	31	0.070
	G3/8	<b>3669 12 17</b>	7.5	20	19.5	46	15	31	0.341
14	G1/2	<b>3669 14 21</b>	9	24	21.5	49	16	34	0.094

The body swivels for positioning purposes.

## 3699 Compact Elbow, Male BSPP and Metric Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		E	F	G	H	J	L	Kg
4	M5x0.8	<b>3699 04 19</b>	3.5	10	10	18	7	18	0.011
	M6x1	<b>3699 04 52</b>	4.5	10	10	18	7	18	0.011
	M8x1	<b>3699 04 56</b>	5	11	10	18	7	18	0.013
	G1/8	<b>3699 04 10</b>	5.5	13	10	17	7	18	0.014
	G1/4	<b>3699 04 13</b>	6.5	16	10	17.5	7	18	0.019
6	M10x1	<b>3699 06 60</b>	5.5	13	12	19	8	21.5	0.017
	G1/8	<b>3699 06 10</b>	5.5	13	12	19	8	21.5	0.018
	G1/4	<b>3699 06 13</b>	6.5	16	12	19.5	8	21.5	0.022
8	G1/8	<b>3699 08 10</b>	5.5	13	15	20.5	10	23.5	0.021
	G1/4	<b>3699 08 13</b>	6.5	16	15	21.5	10	23.5	0.027
	G3/8	<b>3699 08 17</b>	7.5	20	15	21.5	10	23.5	0.033
10	G1/4	<b>3699 10 13</b>	6.5	16	17.5	27	12	29	0.037
	G3/8	<b>3699 10 17</b>	7.5	20	17.5	25.5	12	29	0.043
	G1/4	<b>3699 12 13</b>	6.5	16	19.5	29.5	15	31	0.050
12	G3/8	<b>3699 12 17</b>	7.5	20	19.5	28.5	15	31	0.057
	G1/2	<b>3699 12 21</b>	9	24	19.5	28.5	15	31	0.065
14	G3/8	<b>3699 14 17</b>	7.5	20	21.5	29	16	34	0.059
	G1/2	<b>3699 14 21</b>	9	24	21.5	29.5	16	34	0.062

The body swivels for positioning purposes. Maxi pressure = 20 bar

## 3608 Stud Branch Tee, Male BSPT Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		F	G	H	J	L/2	Kg
4	R1/8	<b>3608 04 10</b>	10	10	24.5	7	18	0.020
	R1/4	<b>3608 06 10</b>	13	12	29.5	8	21.5	0.031
6	R1/4	<b>3608 06 13</b>	14	12	30.5	8	21.5	0.038
	R1/8	<b>3608 08 10</b>	14	15	32.5	10	23.5	0.040
8	R1/4	<b>3608 08 13</b>	14	15	34	10	23.5	0.047
	R1/4	<b>3608 10 13</b>	18	17.5	39	12	29	0.067
10	R3/8	<b>3608 10 17</b>	18	17.5	41	12	29	0.070
	R3/8	<b>3608 12 17</b>	20	19.5	46.5	15	31	0.094
14	R1/2	<b>3608 14 21</b>	22	21.5	50.5	16	34	0.125

The body swivels for positioning purposes.

## 3603 Stud Run Tee, Male BSPT Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		F	G	H	H1	J	L	Kg
4	R1/8	<b>3603 04 10</b>	10	10	19.5	18	7	23	0.018
	R1/8	<b>3603 06 10</b>	13	12	23.5	21.5	8	28	0.031
6	R1/4	<b>3603 06 13</b>	14	12	24.5	21.5	8	28	0.037
	R1/8	<b>3603 08 10</b>	14	15	25	23.5	10	31	0.041
8	R1/4	<b>3603 08 13</b>	14	15	26.5	23.5	10	31	0.044
	R1/4	<b>3603 10 13</b>	18	17.5	30.5	29	12	37.5	0.067
10	R3/8	<b>3603 10 17</b>	18	17.5	32.5	29	12	37.5	0.069
	R3/8	<b>3603 12 17</b>	20	19.5	36.5	31	15	40.5	0.103
14	R1/2	<b>3603 14 21</b>	22	21.5	40	34	16	45	0.147

The body swivels for positioning purposes.

## 3698 Stud Branch Tee, Male BSPP and Metric Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		E	F	G	H	J	L/2	Kg
4	M5x0.8	<b>3698 04 19</b>	3.5	10	10	27.5	7	18	0.018
	G1/8	<b>3698 04 10</b>	5.5	13	10	25.5	7	18	0.021
6	G1/8	<b>3698 06 10</b>	5.5	13	12	31	8	21.5	0.031
	G1/4	<b>3698 06 13</b>	6.5	16	12	30.5	8	21.5	0.035
8	G1/8	<b>3698 08 10</b>	5.5	14	15	33.5	10	23.5	0.041
	G1/4	<b>3698 08 13</b>	6.5	16	15	34	10	23.5	0.045
10	G1/4	<b>3698 10 13</b>	6.5	18	17.5	42	12	29	0.066
12	G3/8	<b>3698 12 17</b>	7.5	20	19.5	46	15	31	0.088
14	G1/2	<b>3698 14 21</b>	9	24	21.5	49	16	34	0.119

The body swivels for positioning purposes.

## 3693 Stud Run Tee, Male BSPP and Metric Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		E	F	G	H	H1	J	L	Kg
4	M5x0.8	<b>3693 04 19</b>	3.5	10	10	22.5	18	7	23	0.019
	G1/8	<b>3693 04 10</b>	5.5	13	10	20.5	18	7	23	0.021
6	G1/8	<b>3693 06 10</b>	5.5	13	12	25	21.5	8	28	0.031
	G1/4	<b>3693 06 13</b>	6.5	16	12	24.5	21.5	8	28	0.035
8	G1/8	<b>3693 08 10</b>	5.5	14	15	26.5	23.5	10	31	0.041
	G1/4	<b>3693 08 13</b>	6.5	16	15	26.5	23.5	10	31	0.044
10	G1/4	<b>3693 10 13</b>	6.5	18	17.5	33	29	12	37.5	0.066
12	G3/8	<b>3693 12 17</b>	7.5	20	19.5	36.5	31	15	40.5	0.090
14	G1/2	<b>3693 14 21</b>	9	24	21.5	38.5	34	16	45	0.112

The body swivels for positioning purposes.

## 3618 Single Banjo, Male BSPP and Metric Thread

FDA chemical Nickel-plated brass, FKM




ØD	C		F	H	H1	J	L1	L2	Kg
4	M5x0.8	<b>3618 04 19</b>	8	13	6	10	6	18.5	0.011
	G1/8	<b>3618 04 10</b>	13	16.5	7	15	7.5	22	0.029
6	M5x0.8	<b>3618 06 19</b>	8	13	6	10	5	22.5	0.015
	G1/8	<b>3618 06 10</b>	13	16.5	7	15	7.5	24	0.031
8	G1/4	<b>3618 06 13</b>	17	21	9	18	9	24	0.049
	G1/8	<b>3618 08 10</b>	13	16.5	7	15	7.5	25.5	0.033
10	G1/4	<b>3618 08 13</b>	17	21	9	18	9	26.5	0.051
	G3/8	<b>3618 10 17</b>	20	24.5	11	21.5	11	33	0.105

Maximum temperature: +80°C

# LF 3600 Push-In Fittings / Tube-to-Tube Fittings

## 3606 Equal Tube-to-Tube Connector


FDA chemical Nickel-plated brass, FKM



ØD		G	L	Kg
4	<b>3606 04 00</b>	10	30.5	0.010
6	<b>3606 06 00</b>	12	36.5	0.016
8	<b>3606 08 00</b>	15	37.5	0.021
10	<b>3606 10 00</b>	17.5	47.5	0.034
12	<b>3606 12 00</b>	19.5	50	0.042
14	<b>3606 14 00</b>	21.5	52.5	0.050

## 3602 Equal Elbow


FDA chemical Nickel-plated brass, FKM



ØD		G	L	Kg
4	<b>3602 04 00</b>	10	23	0.010
6	<b>3602 06 00</b>	12	28	0.016
8	<b>3602 08 00</b>	15	31	0.022
10	<b>3602 10 00</b>	17.5	37.5	0.033
12	<b>3602 12 00</b>	19.5	40.5	0.045
14	<b>3602 14 00</b>	21.5	45	0.056

## 3604 Equal Tee


FDA chemical Nickel-plated brass, FKM



ØD		G	H	L/2	Kg
4	<b>3604 04 00</b>	10	23	18	0.014
6	<b>3604 06 00</b>	12	28	21.5	0.023
8	<b>3604 08 00</b>	15	31	23.5	0.032
10	<b>3604 10 00</b>	17.5	37.5	29	0.048
12	<b>3604 12 00</b>	19.5	40.5	31	0.063
14	<b>3604 14 00</b>	21.5	45	34	0.078

## 3616 Equal Bulkhead Connector


FDA chemical Nickel-plated brass, FKM



ØD		F1	F2	K	L1	L2	ØT min	Kg
4	<b>3616 04 00</b>	13	14	14	14	20	12.5	0.018
6	<b>3616 06 00</b>	16	17	17.5	17	22	15	0.028
8	<b>3616 08 00</b>	18	19	19.5	18.5	23.5	17	0.036
10	<b>3616 10 00</b>	22	27	24	21.5	26.5	21	0.063
12	<b>3616 12 00</b>	24	24	26	23	27	23	0.062
14	<b>3616 14 00</b>	27	27	29.5	25.5	29.5	25	0.079

## 3636 Bulkhead Connector, Female BSPP Thread


FDA chemical Nickel-plated brass, FKM



ØD	C	E	F1	F2	H	H1	K	ØT min	Kg
4	G1/8	<b>3636 04 10</b>	8.5	14	14	30.5	11	15	0.020
6	G1/8	<b>3636 06 10</b>	8.5	17	17	33	11	18.5	0.033
	G1/4	<b>3636 06 13</b>	11.5	17	17	37	15	18.5	0.033
8	G1/8	<b>3636 08 10</b>	8.5	19	19	34	10.5	21	0.044
	G1/4	<b>3636 08 13</b>	11.5	19	19	38	14.5	21	0.044
10	G3/8	<b>3636 10 17</b>	12	22	27	42.5	16	24	0.073
12	G3/8	<b>3636 12 17</b>	12	24	24	43	16	26	0.077
	G1/2	<b>3636 12 21</b>	16	27	24	48.5	21.5	29.5	0.133

## 3639 Equal Bulkhead Elbow

FDA chemical Nickel-plated brass, FKM




ØD		F1	F2	G	H	K	L	ØT min	Kg
4	<b>3639 04 00</b>	13	14	10	35	14	18	12.5	0.023
6	<b>3639 06 00</b>	16	17	12	40.5	17.5	21.5	15	0.035
8	<b>3639 08 00</b>	18	19	15	44	19.5	23.5	17	0.046
10	<b>3639 10 00</b>	22	27	17.5	51	24	29	21	0.080
12	<b>3639 12 00</b>	24	24	19.5	55	26	31	23	0.086
14	<b>3639 14 00</b>	27	27	21.5	59	29.5	34	25	0.144

The body swivels for positioning purposes.  
Maxi pressure = 20 bar

# LF 3600 Push-In Fittings / Plug-In Accessories

## 3666 Plug-In Reducer


FDA chemical Nickel-plated brass, FKM



ØD1	ØD2		G	L	L1	L2	Kg
4	6	<b>3666 04 06</b>	10	35	19.5	18	0.008
	8	<b>3666 04 08</b>	10	35.5	20	18	0.009
6	8	<b>3666 06 08</b>	12	38	20	20.5	0.012
	10	<b>3666 06 10</b>	12	43.5	25	21	0.015
8	10	<b>3666 08 10</b>	15	44	25	21.5	0.016
	12	<b>3666 08 12</b>	15	44	26	20.5	0.018
10	12	<b>3666 10 12</b>	17.5	50	26	27	0.026
12	14	<b>3666 12 14</b>	19.5	53	28	28.5	0.032

## 3667 Plug-In Metric/Inch Adaptor


FDA chemical Nickel-plated brass, FKM



ØD1	ØD2		G	L	L1	L2	Kg
6	1/4	<b>3667 06 56</b>	12.5	38.5	19.5	21	0.012
10	3/8	<b>3667 10 60</b>	17	49.5	25	27	0.026
12	1/2	<b>3667 12 62</b>	20	51	26	27.5	0.030

## 3668 Plug-In Increaser


FDA chemical Nickel-plated brass, FKM



ØD1	ØD2		G	L	L1	L2	Kg
6	4	<b>3668 06 04</b>	12	36	17	21.5	0.010

## 3622 Plug-In Barb Connector


FDA chemical Nickel-plated brass



ØD1	ØD2	ØD3		L	L1	L2	Kg
4	3.2	5	<b>3622 04 53</b>	40.5	27	22.5	0.003
	5	7	<b>3622 04 05</b>	40.5	27	22.5	0.005
6	5	7	<b>3622 06 05</b>	43	27	22.5	0.006
	6.3	8.3	<b>3622 08 56</b>	42	25	22.5	0.008
8	8	10	<b>3622 08 08</b>	44	27	22.5	0.010
	6.3	8.3	<b>3622 10 56</b>	47.5	25.5	22.5	0.011
10	8	10	<b>3622 10 08</b>	47.5	25.5	22.5	0.011
	8	10	<b>3622 12 08</b>	48.5	25.5	22.5	0.015
12	10	12	<b>3622 12 10</b>	48.5	25.5	22.5	0.014
	12.5	14.5	<b>3622 12 62</b>	57	34	29.5	0.019
14	12.5	14.5	<b>3622 14 62</b>	57.5	33	29.5	0.022
	14	16	<b>3622 14 14</b>	59.5	35	29.5	0.023

## 3620 Male Stem Connector


FDA chemical Nickel-plated brass



ØD		L	L1	Kg
4	<b>3620 04 00</b>	31	14	0.002
6	<b>3620 06 00</b>	36.5	17	0.005
8	<b>3620 08 00</b>	37.5	17.5	0.007
10	<b>3620 10 00</b>	47.5	22.5	0.011
12	<b>3620 12 00</b>	49.5	23.5	0.015
14	<b>3620 14 00</b>	53	25	0.016

## 3626 Blanking Plug

FDA chemical Nickel-plated brass



ØD		G	L	L1	L2	Kg
4	<b>3626 04 00</b>	6	25.5	17.5	11.5	0.004
6	<b>3626 06 00</b>	8	30.5	19.5	13.5	0.009
8	<b>3626 08 00</b>	10	33	20	16	0.009
10	<b>3626 10 00</b>	12	40	25	18	0.015
12	<b>3626 12 00</b>	14	43	26	20	0.021
14	<b>3626 14 00</b>	16	47	28	22.5	0.029

# LF 3600 Push-In Fittings / Maintenance Kit



.....  
The essential tool to rapidly carry out the main maintenance operations and reduce production interruptions.  
.....

## Advantages

- A selection of 24 references covering the most-used products
- Products available in the most common diameters: 4 mm, 6 mm and 8 mm
- A kit contains more than 232 products and can be easily completed with our standard products

## 3650..33 Maintenance Kit



3650 00 00 33

H L L1 Kg

81 413 330 2,900



# Low Lead Brass LF 3600 Push-In Fittings



This range is designed for applications that require low lead content within the circuit components. These products are made to order, according to your needs and specifications. Please contact us for any project.

**Ø metric:**  
4 to 8 mm

## Technical Characteristics

- **Compatible Fluids:** drinking water and vapour  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 30 bar. Models 3609, 3699 and 3639 are limited to 20 bar
- **Working Temperature:** -25°C to +150°C


Maximum Tightening Torque (daN.m)	Threads		
	M5x0.8	G1/8	G1/4
	0.06	0.8	1.2

Les performances dépendent des fluides, du diamètre et de la nature du tube utilisé. L'utilisation est garantie pour un vide de 755 mm HG (99% de vide).

## Advantages

- Dedicated to coffee machines and beverage vending machines

## Component Materials

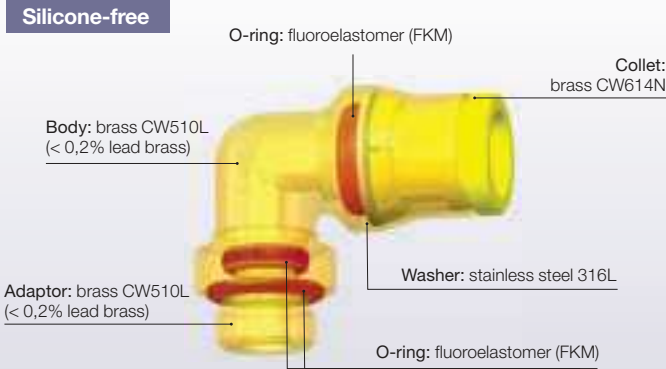


## Regulations

- 1935/2004
- NSF/ANSI 169
- DM 174
- FDA : 21 CFR
- RoHS
- REACH
- EN 16889
- LFGB

## 3601 Stud Fitting, Male BSPP and Metric Thread


Low lead brass, FKM



ØD	C		E	F1	F2	H	Kg
4	G1/8	<b>3601 04 10 84</b>	5.5	13	3	14.5	0.009
	G1/4	<b>3601 04 13 84</b>	6.5	16	3	14.5	0.015
	M5x0.8	<b>3601 04 19 84</b>	3.5	10	2.5	15.5	0.006
6	G1/8	<b>3601 06 10 84</b>	5.5	13	4	17.5	0.011
	G1/4	<b>3601 06 13 84</b>	6.5	16	4	17	0.015
8	G1/8	<b>3601 08 10 84</b>	5.5	16	5	21	0.014

## 3609 Stud Elbow, Male BSPT Thread

Low lead brass, FKM




ØD	C		F	G	H	J	L	Kg
4	R1/8	<b>3609 04 10 84</b>	13	10	15	7	18	0.014
	R1/4	<b>3609 04 13 84</b>	14	10	17	7	18	0.020
6	R1/8	<b>3609 06 10 84</b>	13	12	17.5	8	21.5	0.018
	R1/4	<b>3609 06 13 84</b>	14	12	19	8	21.5	0.025

The body swivels for positioning purposes.

## 3608 Stud Branch Tee, Male BSPT Thread

Low lead brass, FKM




ØD	C		F	G	H	J	L/2	Kg
4	R1/8	<b>3608 04 10 84</b>	10	10	24.5	7	18	0.020

The body swivels for positioning purposes.

## 3614 Stud Fitting, Female BSPP Thread

Low lead brass, FKM




ØD	C		E	F	H	Kg
4	G1/8	<b>3614 04 10 84</b>	7.5	14	25	0.016
	G1/4	<b>3614 04 13 84</b>	11	17	29	0.026
6	G1/8	<b>3614 06 10 84</b>	7.5	14	27.5	0.019
	G1/4	<b>3614 06 13 84</b>	11	17	31.5	0.028

# Low Lead Brass LF 3600 Push-In Fittings

## 3621 Stud Standpipe, Male BSPT Thread


Low lead brass



ØD	C		F	H	H1	Kg
6	R1/8	<b>3621 06 10 84</b>	10	23.5	6.5	0.008

## 3631 Stud Standpipe, Male BSPP Thread


Low lead brass, FKM



ØD	C		E	F	H	H1	Kg
8	G1/8	<b>3631 08 10 84</b>	5.5	13	22.5	6.5	0.010

## 3675 Stud Fitting, Male BSPT Thread


Low lead brass, FKM



ØD	C		F1	F2	H	Kg
4	R1/8	<b>3675 04 10 84</b>	10	3	15	0.009
	R1/4	<b>3675 04 13 84</b>	14	3	15	0.017
6	R1/8	<b>3675 06 10 84</b>	13	4	17	0.011

## 3693 Stud Run Tee, Male BSPP and Metric Thread

Low lead brass, FKM




ØD	C		E	F	G	H	H1	J	L	Kg
4	G1/8	<b>3693 04 10 84</b>	5.5	13	10	20.5	18	7	23	0.021
6	G1/8	<b>3693 06 10 84</b>	5.5	13	12	25	21.5	8	28	0.031

The body swivels for positioning purposes.

## 3698 Stud Branch Tee, Male BSPP and Metric Thread

Low lead brass, FKM




ØD	C		E	F	G	H	J	L/2	Kg
6	G1/8	<b>3698 06 10 84</b>	5.5	13	12	31	8	21.5	0.031

The body swivels for positioning purposes.

## 3699 Compact Elbow, Male BSPP and Metric Thread

Low lead brass, FKM




ØD	C		E	F	G	H	J	L	Kg
4	M5x0.8	<b>3699 04 19 84</b>	3.5	10	10	18	7	18	0.011
	G1/8	<b>3699 04 10 84</b>	5.5	13	10	17	7	18	0.014
	G1/4	<b>3699 04 13 84</b>	6.5	16	10	17.5	7	18	0.019
6	G1/8	<b>3699 06 10 84</b>	5.5	13	12	19	8	21.5	0.018
	G1/4	<b>3699 06 13 84</b>	6.5	16	12	19.5	8	21.5	0.022
8	G1/8	<b>3699 08 10 84</b>	5.5	13	15	20.5	10	23.5	0.021

The body swivels for positioning purposes.

## 3602 Equal Elbow


Low lead brass, FKM



ØD			G	L	Kg
4	<b>3602 04 00 84</b>		10	23	0.010

## 3603 Stud Run Tee, Male BSPT Thread

Low lead brass, FKM




ØD	C		F	G	H	H1	J	L	Kg
4	R1/8	<b>3603 04 10 84</b>	10	10	19.5	18	7	23	0.018

The body swivels for positioning purposes.

## 3604 Equal Tee


Low lead brass, FKM



ØD			G	H	L/2	Kg
4	<b>3604 04 00 84</b>		10	23	18	0.014
6	<b>3604 06 00 84</b>		12	28	21.5	0.023

## 3639 Equal Bulkhead Elbow

Low lead brass, FKM




ØD			F1	F2	G	H	K	L	ØT min	Kg
4	<b>3639 04 00 84</b>		13	14	10	35	14	18	12.5	0.023

The body swivels for positioning purposes.

# Low Lead Brass LF 3600 Push-In Fittings

## 3620 Male Stem Connector


Low lead brass



ØD		L	L1	Kg
4	<a href="#">3620 04 00 84</a>	31	14	0.002
6	<a href="#">3620 06 00 84</a>	36.5	17	0.005

## 3622 Plug-In Barb Connector


Low lead brass



ØD1	ØD2	ØD3		L	L1	L2	Kg
4	3.2	5	<a href="#">3622 04 53 84</a>	40.5	27	22.5	0.003

## 3626 Blanking Plug

Low lead brass



ØD		G	L	L1	L2	Kg
4	<a href="#">3626 04 00 84</a>	6	25.5	17.5	11.5	0.004

### Related Products

- Polyurethane Tubing
- Polyamide Tubing
- Polyethylene Tubing
- Fluoropolymer Tubing
- Anti-Spark Tubing
- Fireproof PA Tubing
- Brass Flow Control Regulators